

Polyester putty

Product Category: **C 2.1**

Fields of use

Multi-purpose putty for coarse and fine body filling operations in automotive refinishing.

Additional Information

Technical characteristics

Solids content 86 % ± 2	Density 1.730–1.830 g/cm ³
Storage temperature min. 5°C to max. 45°C	Shelf life 12 months

Application

Stir well before use. Thoroughly mix BASIC STOP and the hardener. Weigh in exactly the amounts indicated in the mixing ratio. If you add too much hardener, edge markings may occur while if you add too little hardener, drying will take longer.

Substrate / Pre-treatment / Cleaning

Clean with PK 700 or PK 900.
Sand (steel and galvanized steel with P80, aluminum with P150-P180).
Clean with PK 1000.


Suitable substrates are derusted steel, glass-fiber reinforced plastics, rather small areas on galvanized steel or aluminum panels. Do not use the product on phosphating primers or thermoplastic substrates.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.mppaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 12/2014



BASIC STOP

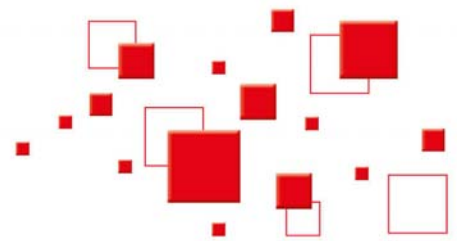

	BASIC STOP	100 g
	BASIC STOP Hardener	3 g
	Potlife:	4 – 5 min. at 20°C
	Number of coats	2 – 3
	Drying at 20°C: Drying at 60°C:	20 – 30 min. 10 min.
	(short wave) (medium wave)	4 min. at 50% 6 min.
	Dry with P80, P150, P240	

Finishing

Safety instructions

2004/42/IIIB(b)(250)180: The EU limit value for this product (product category: IIB.b) in ready-for-use form is max 250 grams of VOC per liter. The VOC content of this product is 180 g/l.

It cannot be ruled out that this product contains particles < 0.1 µm.

The products are suitable for professional use only.

For the use of this product please adhere to the actual safety recommendations and the personal protective equipment.