


Technical Information

CHRONOTOP

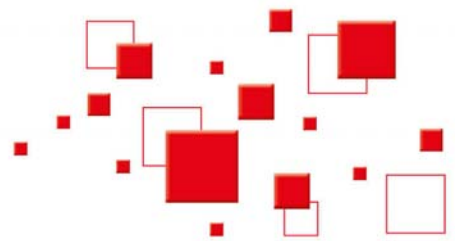

Fast drying clear

Product Category: **C 4**

Fields of use

For small repairs (blend-in repairs, refinishing of one or two vertical panels).

Additional Information

Technical characteristics

Solids content 42 % ± 2	Density 0.920 – 1.020 g/cm ³
Storage temperature min. 5°C up to max. 45°C	Shelf life 36 months

Application

Note: Use slow BC 030 thinner in high temperatures or when air speed in booth is high.

Substrate / Pre-treatment / Cleaning


CHRONOTOP was designed for use on DIAMONT basecoats.







The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.mppaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 12/2014

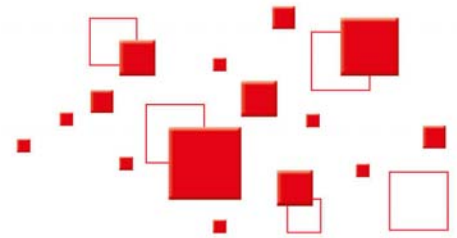

CHRONOTOP



	CHRONOTOP H 9000 BC 020	100% by vol. 25% by vol. 25 – 50% by vol.	100 g 27 g 23 – 45 g
	Viscosity at 20°C: ISO 4 cup: DIN 4 cup:	20 to 28 seconds 14 to 16 seconds	
	Potlife: 4 hours at 20°C		
	HVLP gravity-feed spraygun Compliant gravity-feed spraygun	1.3 – 1.5 mm 1.3 – 1.4 mm	0.7 bar at the nozzle 2.0 – 2.5 bar
	Number of spraycoats: Film thickness:	2 50 µm	
	Drying at 20°C: Drying at 60°C:	Dust-free after 20 min. Ready for assembly after 2 hours Fully cured after 10 hours 15 min.	
	(short wave)	8 min.	

Finishing

Finishing operations after specified drying times and cooling.

Safety instructions

It cannot be ruled out that this product contains particles < 0.1 µm.

The products are suitable for professional use only.

For the use of this product please adhere to the actual safety recommendations and the personal protective equipment.