


Technical Information

PK 300W

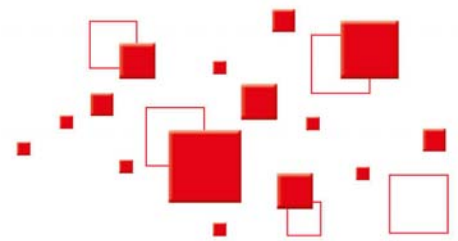

Preparation wipes

Product category: **C 5**

Fields of use

R-M preparation wipes are intended for use on cleaned bare metal surfaces such as steel, galvanized steel and aluminum. Thanks to their chemical reaction in contact with metal surfaces, R-M preparation wipes increase the corrosion resistance and adhesion of the paint system to be applied.

Additional Information

Recoatable with all R-M undercoat materials, except polyester body filler and waterborne products (HYDROFILLER II). If you want to reuse the wipes during the same working day, store them in a container or in a resealable plastic bag. This will protect the wipes from drying out. Do not return used wipes to the original packaging.

Technical characteristics

Solids content /	Theoretical spreading rate per cloth 3 m ²
Storage temperature min. 5°C to max. 45°C	Shelf life 24 months

Application

Substrate / Pre-treatment / Cleaning

Observe process-related regulations. Use on bare metal surfaces only.


The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.mpaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.





R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 03/2017



Technical Information

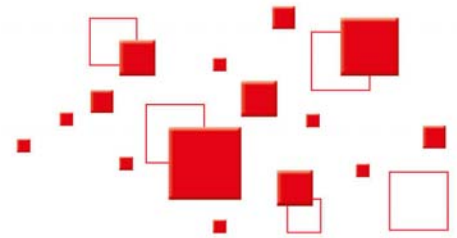PK 300W



	Close the container immediately after removing a preparation wipe to protect the other wipes from drying out.
	PK 1000, PK 2000 (see relevant refinishing systems)
	Evenly wet the entire bare metal surface with PK 300W. (Wipe in overlapping single cross coats). The surface must stay moist for at least 1 minute. This is imperative for the chemical reaction to complete and form a passivation layer.
	Flash off at 20°C Matt surface Max. 8 h

Finishing

Can be overcoated with all R-M undercoat materials, see technical data sheet or refinishing systems.

Safety instructions

2004/42/II B(c)(780)8: The EU limit value for this product (product category: IIB.c) in ready-for-use form is max 780 grams of VOC per liter. The VOC content of this product is 8 g/l.

It cannot be ruled out that this product contains particles < 0.1 µm.

The products are suitable for professional use only.

For the use of this product please adhere to the actual safety recommendations and the personal protective equipment.