


# Technical Information

## AM 950 BLENDING FLASH

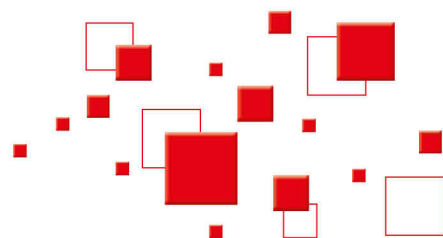

Blending thinner

Product Category: **C 5**

### Fields of use

Smooths transition area, by use of blending processes.

### Additional Information

#### Technical characteristics

Solids content /	Density 0.680 – 0.780 g/cm <sup>3</sup>
Storage temperature min. 5°C to max. 45°C	Shelf life 24 months

### Application

The product is ready for use. Shake well before use.

### Substrate / Pre-treatment / Cleaning

See BLEND'ART processes.


The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at [www.rmpaint.com](http://www.rmpaint.com) or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.




R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 08/2019



# Technical Information
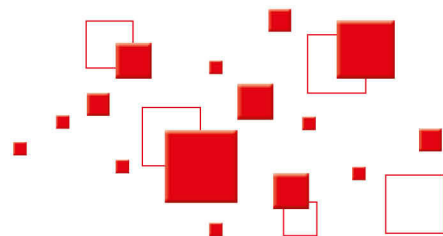
## AM 950 BLENDING FLASH



	Do not use deformed aerosol cans. While shaking the can, do not strike against solid objects. During shaking, the mixing balls are released. Avoid bumps, friction and impact.
	2 – 3 spraycoats to the clear fade-out areas to smooth them.
	As recommended for the R-M clear used.

### Finishing

If necessary, minor defects can be polished out with any standard fine polishing compound once the clear coat has fully cured.

### Safety instructions

**2004/42/IIIB(e)(840)839:** The EU limit value for this product (product category: IIB.e) in ready-for-use form is max 840 grams of VOC per liter. The VOC content of this product is 839 g/l.

It cannot be ruled out that this product contains particles < 0.1 µm.

The products are suitable for professional use only.

For the use of this product please adhere to the actual safety recommendations and the personal protective equipment.

