

Blending thinner

Product Category: **C 5**

Fields of use

Smooths transition areas by use of blending processes.

Additional Information

Technical characteristics

Solids content /	Density 0.860 – 0.960 g/cm ³
Storage temperature min. 5°C to max. 45°C	Shelf life 60 months

Application

The product is ready for use. Shake well before use

Substrate / Pre-treatment / Cleaning


See BLEND'ART processes.





The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.mpaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 12/2014

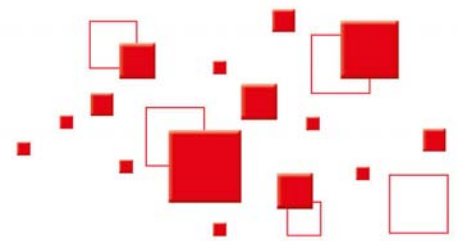

BLENDING FLASH



	Viscosity at 20°C: ISO 4 cup: 17 seconds DIN 4 cup: 13 seconds
	HVLP Minijet gun 1.0 – 1.2 mm 0.5 – 0.7 bar at the nozzle
	2 – 3 spraycoats to the clear fade-out areas to smooth them.
	As recommended for the R-M clear used.

Finishing

If necessary, minor defects can be polished out with any standard fine polishing compound once the clear coat has fully cured.

Safety instructions

2004/42/II B(e)(840)839: The EU limit value for this product (product category: IIB.e) in ready-for-use form is max 840 grams of VOC per liter. The VOC content of this product is 839 g/l.

It cannot be ruled out that this product contains particles < 0.1 µm.

The products are suitable for professional use only.

For the use of this product please adhere to the actual safety recommendations and the personal protective equipment.