


Technical Information

D 92

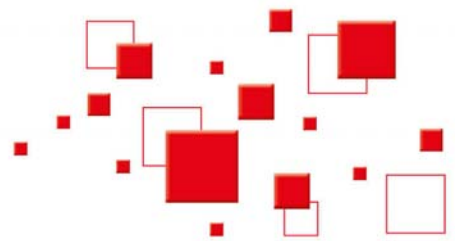

Isocyanate hardener for use in high temperatures

Product Category: **C 5**

Fields of use

Hardener specially designed for use in high temperatures to preserve all the characteristics of R-M topcoats and clears.

Additional Information

It should be used in temperatures in excess of 30°C in the following clears: DIAMONTOP MS, STARTOP HS

Technical characteristics

Solids content 45 % ± 2	Density 0.930– 1.030 g/cm ³
Storage temperature min. 5°C to max. 45°C	Shelf life 24 months

Application

Stir well before use.

Substrate / Pre-treatment / Cleaning

As specified in the technical data sheet of the product in which D 92 is being used.


The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.mpaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 12/2014



Technical Information

D 92

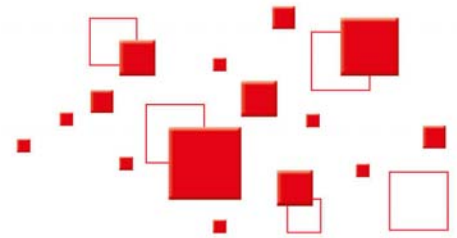

	DIAMONTOP MS D 92	100% by vol. 40% by vol.	100 g 43 g
	STARTOP HS D 92 BC 020, BC 030	100% by vol. 50% by vol. 15% by vol.	100 g 52 g 14 g
	Potlife: 7 hours at 20°C		
	As specified in the technical data sheet of the product in which D 92 is being used.		
	As specified in the technical data sheet of the product in which D 92 is being used.		
	Drying at 20°C: Drying at 60°C:	24 hours 30 min.	

Finishing

Refinished panels can be recoated or mounted after drying and – if required – cooling.

Safety instructions

It cannot be ruled out that this product contains particles < 0.1 µm.

The products are suitable for professional use only.

For the use of this product please adhere to the actual safety recommendations and the personal protective equipment.