


Technical Information

SUPREMECLEAR

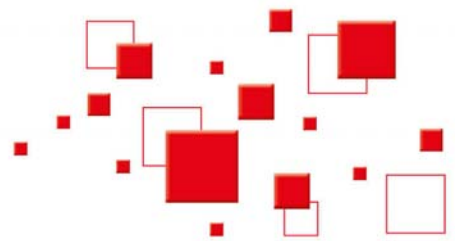

Scratch-resistant clear

Product Category: **C 4**

Fields of use

Clear for repairing vehicles with scratch-resistant original paint finishes.

Additional Information

Technical characteristics

Solids content 48 % ± 2	Density 0.940 – 1.040 g/cm ³
Storage temperature min. 5°C up to max. 45°C	Shelf life 36 months

Application

Note: Use the slower SC 880 thinner in temperatures above 25°C or when refinishing large surfaces.

Substrate / Pre-treatment / Cleaning






SUPREMECLEAR was designed for use on DIAMONT and ONYX HD basecoats.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.mppaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 12/2014





	SUPREMECLEAR H 9000 SC 850	100% by vol. 25% by vol. 25% by vol.	100 g 27 g 22 g
	Viscosity at 20°C: ISO 4 cup: DIN 4 cup:	28 to 32 seconds 16 to 17 seconds	
	Potlife: 4 hours at 20°C		
	HVLP gravity-feed spraygun Compliant gravity-feed spraygun	1.3 – 1.5 mm 1.3 – 1.4 mm	0.7 bar at the nozzle 2.0 – 2.5 bar
	Number of spraycoats: Film thickness:	2 60 µm	
	Drying at 60°C	30 min.	
	(short wave)	8 min.	

Finishing

Finishing operations after specified drying times and cooling

Safety instructions

It cannot be ruled out that this product contains particles < 0.1 µm.

The products are suitable for professional use only.

For the use of this product please adhere to the actual safety recommendations and the personal protective equipment.