

# Technical Information

## SUPREMETOP CP



Ultra scratch-resistant VOC clear

Product Category: **C 4**

### Fields of use

Low-solvent clear for repairing vehicles with scratch-resistant original paint finishes.

### Additional Information

The SUPREMETOP CP clearcoat ensures an excellent and perfect finish quality. The product is scratch-resistant thanks to its good "reflow" properties. SUPREMETOP CP offers excellent polishability.

### Technical characteristics

Solids content 55 % ± 2	Density 0.950 – 1.050 g/cm <sup>3</sup>
Storage temperature min. 5°C up to max. 45°C	Shelf life 36 months

### Application

Note: Use slower SC 880 / GV 500 thinner for higher temperatures or when refinishing large surfaces. For combi-booths, take additional heating rate into account until panel temperature has been reached.

### Substrate / Pre-treatment / Cleaning


SUPREMETOP CP was designed for use on ONYX HD and DIAMONT basecoats (add 3% of H 9000 to DIAMONT mixing bases).







The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at [www.mppaint.com](http://www.mppaint.com) or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 12/2014

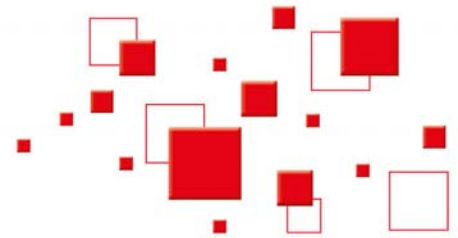

## SUPREMETOP CP



	SUPREMETOP CP H 802 SC 850	100 g 40 g 20 g	
	Viscosity at 20°C: ISO 4 cup: DIN 4 cup:	40 to 50 seconds 18 to 20 seconds	
	Potlife: 1 hour at 20°C		
	HVLP gravity-feed spraygun Compliant gravity-feed spraygun	1.3 – 1.5 mm 1.3 – 1.4 mm	0.7 bar at the nozzle 2.0 – 2.5 bar
	Number of spraycoats: Film thickness:	2 40 – 60 µm 3 – 5 minutes between spraycoats	
	Drying at 60°C	40 min.	
	(short wave)	10 min.	

### Finishing

Finishing operations after specified drying times and cooling

### Safety instructions

2004/42/IIIB(d)420)419: The EU limit value for this product (product category: IIB.d) in ready-for-use form is max 420 grams of VOC per liter. The VOC content of this product is 419 g/l.

It cannot be ruled out that this product contains particles < 0.1 µm.

The products are suitable for professional use only.

For the use of this product please adhere to the actual safety recommendations and the personal protective equipment.