


ONYX HD


Colors for interiors

B 3

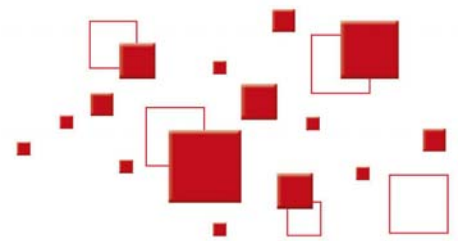

Process description

Vehicle interiors (engine compartments and boots) often have mat or silky mat solid-color finishes. There are ONYX HD mixing formulas for these colors on the color information media, identified by this pictogram:



As an efficient repair solution, the process described below allows you to apply ONYX HD as a single-stage topcoat without any clear coat.

Substrates

- R-M fillers
- Automotive OEM finishes, fully cured and solvent-resistant
- Electro-coated surfaces

Products required

- PK 1000 and PK 2000
- ONYX HD
- ONYX INTERIOR




Safety instructions

It cannot be ruled out that these products contain particles < 0.1 µm.

The products are suitable for professional use only.

For the use of these products please adhere to the actual safety recommendations and the personal protective equipment.

Pre-treatment

	Degreasing PK 1000
	Sanding P400 Use a sanding pad on areas that are difficult to reach.
	Degreasing PK 2000

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.mppaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 12/2014

