


Technical Information

PK 1000 / PK 2000

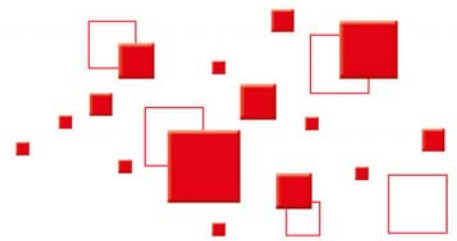

Degreasing and cleaning agents

Product Category: **C 1**

Fields of use

PK 1000 is particularly well suited for removing grease, oil and silicone and for the pre-treatment of plastic surfaces.

Before the application of DIRECTFILLER use PK 1000.

PK 2000 is intended for cleaning operations prior to the application of HYDROFILLER II or ONYX HD.

Additional Information

Technical characteristics

Solids content PK 1000: 1.0 % PK 2000: /	Density PK 1000: 0.930 – 1.030 g/cm ³ PK 2000: 0.930 – 1.030 g/cm ³
Storage temperature min. 5°C up to max. 45°C	Shelf life 60 months

Application

PK 1000 and PK 2000 are ready for use.

Substrate / Pre-treatment / Cleaning

Use PK 1000 and PK 2000 before and after sanding.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.mppaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 12/2014



Technical Information

PK 1000 / PK 2000



Soak a clean and dry lint-free cloth with PK 1000 or PK 2000.
Clean small areas of approx. 0.5 m² of the surface to be painted and wipe these areas immediately afterwards with a dry cloth of the same quality.
PK 1000 and PK 2000 should not dry on the surface being treated.

Attention:

Some 1K primers may suffer surface etching from the use of PK 1000. In this case, ensure a good flash-off so that no solvents will be trapped in the new paint system. In extreme cases, remove the 1K primer coat before applying the new paint system.

Finishing

Continue with the next step of the repair process.

Safety instructions

PK 1000: 2004/42/IIB(all)(200)186: The EU limit value for this product (product category: IIB.all) in ready-for-use form is max 200 grams of VOC per liter. The VOC content of this product is 186 g/l.

PK 2000: 2004/42/IIB(all)(200)198: The EU limit value for this product (product category: IIB.all) in ready-for-use form is max 200 grams of VOC per liter. The VOC content of this product is 198 g/l.

It cannot be ruled out that this product contains particles < 0.1 µm.

The products are suitable for professional use only.

For the use of these products please adhere to the actual safety recommendations and the personal protective equipment.